


Value+

Wire Trackers

- With Crimping Crystal Test;
- Cable Checking (WT20B and WT20C);
 - PoE Voltage Test;
 - Port Blink Test;
 - Able to check network cable (4P4C and 8P8C), phone line and coaxial line;
 - With low power consumption;
 - Auto Power Off to save battery power.

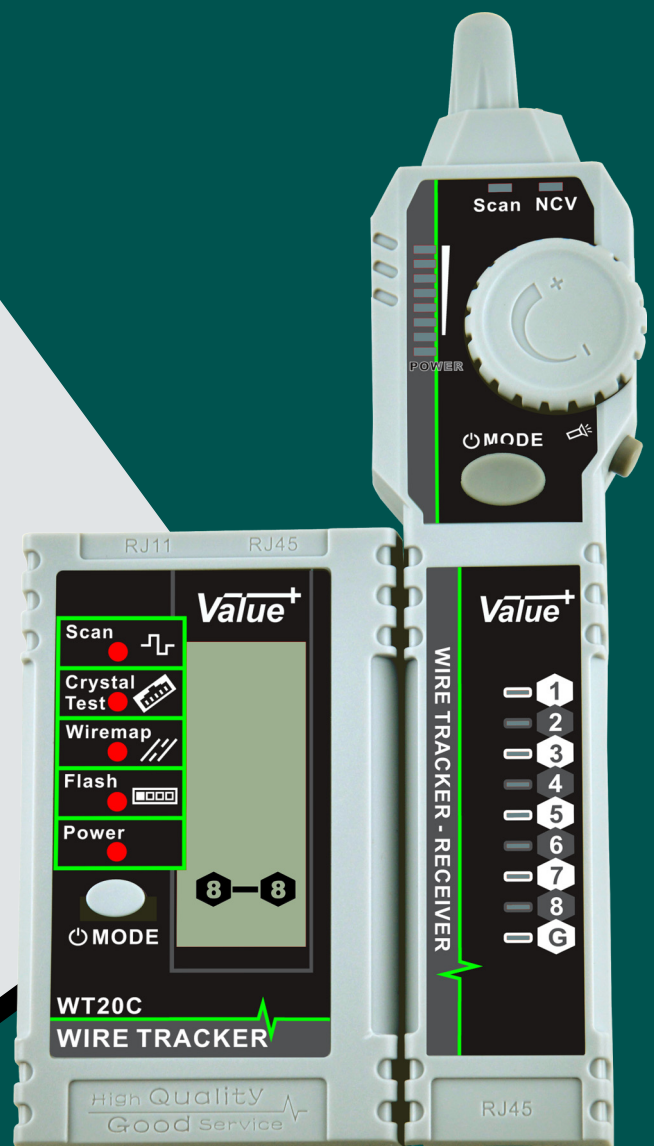

Wire Trackers



Specifications

| | WT20A | WT20B | WT20C |
|---|---|---------|-------|
| Digitalized Cable Tracing | | ✓ | ✓ |
| Tracing cables connected to ethernet hub with POE support | | ✓ | ✓ |
| Signal Level indication | | ✓ | ✓ |
| Port Blink Test | 100W | ✓ | ✓ |
| | 1000W | ✓ | ✓ |
| Display POE Power Pinouts | ✓ | ✓ | ✓ |
| 60V POE Hipot Protection | ✓ | ✓ | ✓ |
| Crimping Crystal Test | ✓ | ✓ | ✓ |
| Cable Testing | | | |
| Shorts | ✓ | ✓ | ✓ |
| Open | ✓ | ✓ | ✓ |
| Split pair | ✓ | ✓ | ✓ |
| NCV | | ✓ | ✓ |
| Tracing signal transmission distance | | 3km | |
| Output signal level | | ~15Vp-p | |
| Vibration induction | | | ✓ |
| Flashlight | | ✓ | ✓ |
| Signal Level Indication | | ✓ | ✓ |
| Tracing Sensitivity Adjustable | | ✓ | ✓ |
| NCV Sensitivity Adjustable | | ✓ | ✓ |
| Low Battery Indication | ✓ | ✓ | ✓ |
| Auto Power Off | ✓ | ✓ | ✓ |
| Input Jack Indicators | | ✓ | |
| Power by | Transmitter : 9V (6F22) | ✓ | ✓ |
| | 3.7V, 800mAH Lithium Ion Battery | | ✓ |
| | Receiver : 3.7V, 800mAH Lithium Ion Battery | ✓ | ✓ |
| Working Current | 30~40mA | | |

* All information provided are subject to change without prior notice.

Your Distributor :



Futronix Co.

HONG KONG

www.futronix-hk.com

info@futronix-hk.com